

ASIC/3-9520 Features

- BACnet B-BC certified
- 32-bit ARM7 processor
- 100Mb Ethernet and Optional wireless
- BACnet/IP with routing capabilities
- System Bus for ASI or BACnet MS/TP communication
- Local Bus for BACnet, ASI, or Modbus Master RTU
- Compatible with ASI IntelliFRONT and Niagara
- USB Device Service Port
- USB Host
- Two-part screw terminal input, output and power connections
- 8 Universal Inputs, expandable to 24 with USB-IO Expanders
- 8 Binary Relay Outputs, expandable to 24 with USB-IO Expanders
- 4 Analog Outputs, expandable to 12 with USB-IO Expanders
- USB Power (500mA Max)

ASIC/3 Programmable System Controller represents a new generation of communicating distributed direct digital control for unitary equipment and building systems. The ASIC/3 controller is designed to be hardware compatible with the ASIC/2 Programmable controllers and offers expanded communication capability including USB, BACnet, Ethernet and Wireless.


The ASIC/3 provides energy management and control of a wide range of building systems including air handlers, chillers, cooling towers, boilers, pumps, lighting, etc. Applications range from autonomous control of retail stores, branch banks, and telephone company buildings to networked control of very large buildings. It has a switching power supply for AC operation and flash memory for program and data storage.

The controller is easily configured using ASI Visual Expert configuration software that links ready-made objects including scheduling, logic, PID control, alarming, optimum start, trending, run-time accumulation, and electrical demand management. The ASIC/3 has an on-board battery-backed calendar clock and allows special events, holidays, and schedules to be defined in advance. Configuration data is stored in non-volatile memory that retained through power system and local buses and ASIC/2 controllers, loss. The ASIC/3 controller has two RS-485 communication ports. The system bus is used to network multiple ASIC/3 or optionally the system bus can support BACnet MS/TP with routing from the BACnet/IP port. The local bus can poll ASIC/1 terminal controllers and make control decisions based on the data received. No central system is needed to supervise the controller. The local bus can also support Modbus Master RTU or BACnet MS/TP with routing. Red and green LEDs indicate the controller's receive and transmit communications.

The ASIC/3 can operate as part of a larger communicating control network. The ASIC/3 offers Ethernet communication and alarm notification via wired 10/100 Mbps connection or optional WiFi module. The ASIC/3 also features a full-speed 12 Mbps USB Device connection for service in the field. The RS-485 connections support baud rates up to 57,600 bps, and standard BACnet MS/TP baud rates up to 76,800 bps are also supported.

The controller can send notify messages the system bus to a computer running ASI Weblink software. Temperatures, setpoints, and other controller data may be easily reported to IntelliFront, ASI WebLink, or Niagara.

The eight 24 Vac relay outputs are ideal for driving contactors and starters. The eight analog outputs are used for modulating actuators, electronic-pneumatic transducers, variable speed drives and other analog signal devices. The eight universal inputs may be used for counting pulses, for reading thermistors and contact closures directly, and for reading 4 to 20 mA or 0 to 10 Vdc input signals.

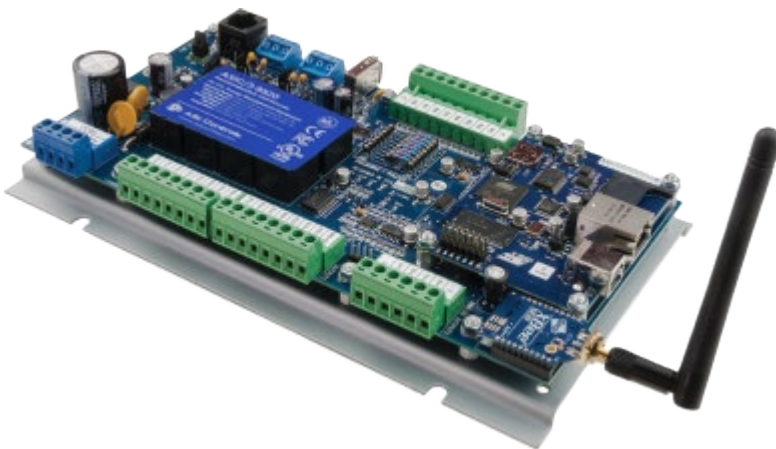

Specifications

Control Power

Supply Voltage: 24 Vac +/- 15%,
50/60Hz
Power Consumption: 27 VA (plus loads)
Protection: PS1, Polyswitch, MOV
Connection: 2-part screw terminal
Indication: Red LED

Binary Outputs 8 (expandable to 24)

Type: Form "A" Relay SPST N.O. Dry Contacts
Voltage Rating: Class 2, 24 Vac or 24 Vdc
Current Rating: 1 A General Use
Connection: 2-part screw terminal
Indication: Red LED, Binary Outputs

Analog Outputs 4 (expandable to 12)

Type: Analog 0-10Vdc, 20 mA
Resolution: 1% full scale
Protection: TVS, 10 V, 600W peak
Connection: 2-part screw terminal
Alternate Protocol: BACnet MS/TP

Inputs 8 (expandable to 24)

Type: Universal Analog/Binary
Range: 0 to 10 Vdc, 12-bit, 0.1% full scale
Connection: 2-part screw terminal.

RS-485 Communications (2)

Format: RS-485, optional 120 ohm Termination
Protection: 500 mW-s TVS with 100 mA Polyswitch
Maximum Length: 4000 ft (1.2 km) RS-485
Connection: 3 Position, screw terminals
Indication: Red LED Receive, Green LED Transmit

System Bus Communication

ASI Address Range: 1 to 65535 (except group & global addresses)
Maximum Size: Up to 32 loads

Alternate Protocol: BACnet MS/TP

Local Bus Communication

ASI Address Range: 1 to 65535 except for group and global addresses
Maximum Size: Up to 32 loads
Alternate Protocols: Modbus Master RTU
BACnet MS/TP

Ethernet Networking

Communication: ASI via UDP/IP or TCP/IP;
BACnet/IP
10 Mbit/s or 100 Mbit/s
Requires 100 MHz Ferrite Core on Ethernet cable.
Optional Wireless: XBee Module Ready (ASI protocol)

Other

Indication: LEDs, 1 Power, 2 Rx/Tx, 8 Output
Dimensions: 5.5" x 9.2" x 2.0"
(140mm x 234 mm x 51 mm)
USB Host Port: 5 Vdc 500 mA max
Weight: 1.6 lbs (0.7 kg)

Environmental

Operating: 45 °C max (+113 °F)
10 to 95% RH non-condensing
Storage: -37 to 80 °C (-35 to +180 °F)
5 to 95% RH non-condensing

UL Listing

UL-916 Open Energy Management Equipment
C22.2 No. 205-M1983 Canada Signal Equipment
File E123287 (PAZX, PAZX7) Class 2 Device
Meets CE Requirements. per EN61326-1
FCC Part B Class A (CISPR11)

| How to Order: | Order Number: |
|------------------------------------|---------------|
| Programmable Unitary Controller | ASIC/3-9520 |
| USB-IO Expander (8 UI, 8 BO, 4 AO) | ASIC/3-USB-IO |

| Software: | Order Number |
|-----------------------------------|--------------|
| ASI Expert Configuration Software | ASI Expert |





ASIC/3-9520

Programmable Unitary Controller